

Test Report No. AJFS1801000867FF Date: MAR.06, 2018 Page 1 of 8

AKPA ALUMINYUM SAN. VE TIC. A.S.

HURRIYET MAH. DR CEMIL BENGU SK. NO:6 KAGITHANE/ISTANBUL PC: 34403

The following sample(s) was / were submitted and identified on behalf of the client as:

Sample Description: PRIMEBOND PLUS A2 and B1-FR / PRIMEBOND A2 and B1-FR (4 SAMPLES)

Color: WHITE Thickness: 4MM

Style/Item No.: PP-2000 / AB-200

Composition: INORGANIC MATERIAL

<u>Supplier</u>: AKPA ALUMINYUM SAN. VE TIC. A.S. <u>Buyer</u>: AKPA ALUMINYUM SAN. VE TIC. A.S.

Manufacturer: AKPA ALUMINYUM SAN. VE TIC. A.S.

<u>Country of Destination</u>: TURKEY <u>End Use Application</u>: FACADE

Test Requested:

1. EN 13501-1:2007+A1:2009 Fire classification of construction products and building elements—Part 1: Classification using data from reaction to fire tests, Class A2 & Class B

Test Results: -- See attached sheet --

Test Period:

Sample Receiving Date : FEB.09, 2018

Test Performing Date : FEB.09, 2018 TO MAR.05, 2018

Signed for and on behalf of SGS-CSTC Co., Ltd. Anji Branch

Allen Zou

Technical Manager





No. AJFS1801000867FF

Date: MAR.06, 2018

Page 2 of 8

1. Sample A (EN 13501-1:2007+A1:2009, Class B)

I. Test conducted

This test is conducted as per EN 13501-1:2007+A1:2009 Fire classification of construction products and building elements — Part 1: Classification using data from reaction to fire tests. And the test methods as following:

- 1. EN 13823:2010+A1:2014 Reaction to fire tests for building products Building products excluding floorings exposed to the thermal attack by a single burning item.
- EN ISO 11925-2:2010+Corl:2011 Reaction to fire tests -Ignitability of building products subjected to direct impingement of flame — Part 2: Single-flame source test.

II. Details of classified product

a) Nature and end use application

The product "Aluminium Composite Panel" is defined as building material. Its end use application: Facade Cladding (exterior).

b) Description

The details of the product given above have been prepared from information provided by the sponsor of the test.

Description	Aluminium Composite Panel			
Color	Red			
Thickness	4 mm			
Bulk Density	About 2500 kg/m ³			

Mounting and fixing:

Fibre cement board, with its density approximate 1800kg/m³, thickness approximate 9mm, is as the substrate. The test specimens are fixed mechanically to the substrate with screws. No joint in the long wing.

III. Test results

Test method	Parameter	Number of tests	Results
EN 13823	FIGRA(W/s)		2.8
	LFS < edge of specimen		Yes
	THR _{600s} (MJ)		0.3
	SMOGRA(m ² /s ²)	3	4.0
	TSP _{600s} (m ²)		10.7
	Flaming particles or droplets		No

To be continued...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/rems-and-Conditions.agox and, for electronic Focuments at <a href="http://www.sgs.com/en/rems-and-Conditions-and-Conditions-and-C



No. AJFS1801000867FF

_				
Date:	МΔ	R NA	ະວາ	าาม

Page 3 of 8

Test method	Parameter	Specimen number	Results
EN ISO 11925-2 Exposure = 30 s	<i>F</i> s ≤ 150 mm	6	Yes
	Ignition of the filter paper	0	No

IV. Classification and direct field of application

This classification has been carried out in accordance with EN 13501-1:2007+A1:2009.

a) Classification

The product, Aluminium Composite Panel, classification is as following,

Fire behaviour	ire behaviour		Smoke production		Flam	ning droplets
В	_	S	1	,	d	0

Reaction to fire classification: $B-s_1$, d_0

Remark: The classes with their corresponding fire performance are given in annex A.

b) Field of application

This classification for the submitted sample is valid for the following end use condition:

- --- With all substrate classified as A1 and A2
- --- With mechanically fixing
- --- No joint

This classification is valid for the following product parameters:

---Characteristics of various layers identical to those as described in § II b) of this test reports.

To be continued...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is acvised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



No. AJFS1801000867FF

Date: MAR.06, 2018

Page 4 of 8

2. Sample B (EN 13501-1:2007+A1:2009, Class A2)

I. Test conducted

This test is conducted as per EN 13501-1:2007+A1:2009 Fire classification of construction products and building elements — Part 1: Classification using data from reaction to fire tests. And the test methods as following:

- 1. EN 13823:2010+A1:2014 Reaction to fire tests for building products Building products excluding floorings exposed to the thermal attack by a single burning item.
- EN ISO 1716:2010 Reaction to fire tests for building products Determination of the heat of combustion.

II. Details of classified product

a) Nature and end use application

The product "Aluminium Composite Panel" is defined as building material. Its end use application: Facade Cladding (exterior).

b) Description

Description	Aluminium Composite Panel			
Color	Aluminum composite panel: Red Paint and core materials: White			
Thickness	4 mm			
Bulk Density About 2500 kg/m ³				

Mounting and fixing:

Fibre cement board, with its density approximate 1800kg/m³, thickness approximate 9mm, is as the substrate. The test specimens are fixed mechanically to the substrate with screws. No joint in the long wing.

III. Test results

Test method	Parameter	Number of tests	Results
EN 13823	FIGRA(W/s)		2.8
	LFS < edge of specimen		Yes
	THR _{600s} (MJ)		0.3
	SMOGRA(m ² /s ²)	3	4.0
	TSP _{600s} (m ²)		10.7
	Flaming particles or droplets		No

To be continued...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms_and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms_and-Conditions/Terms_en-Document_aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits or Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgsgroup.com.cn 中国·新江·安吉县阳光工业园二区阳光大道301号 邮编:313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com



Test Report No. AJFS1801000867FF Date: MAR.06, 2018 Page 5 of 8

EN ISO 1716	PCS/ MJ/kg ^a		0
	PCS/ MJ/m ^{2 b}	2	0.81
	PCS/ MJ/m ^{2 d}	3	0
	PCS/ MJ/kg ^e		0.13

Note: PCS — gross calorific potential [MJ/kg or MJ/m²]

IV. Classification and direct field of application

This classification has been carried out in accordance with EN 13501-1:2007+A1:2009

a) Classification

The product, Aluminium Composite Panel, classification is as following,

Fire behaviour		Smoke production			Flam	ning droplets
A2	-	S	1	,	d	0

Reaction to fire classification: A2-s1, d0

Remark: The classes with their corresponding fire performance are given in annex A.

b) Field of application

This classification for the submitted sample is valid for the following end use condition:

- --- With all substrate classified as A1 and A2
- --- With mechanically fixing
- --- No joint

This classification is valid for the following product parameters:

---Characteristics are described in § II b) of this test report.

Statement: The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

Warning:

This classification report does not represent type approval or certification of the product.

The test laboratory has, therefore, play no part in sampling the product for the test, although it holds appropriate references to the manufacturer's factory production control that is aimed to be relevant to the samples tested and that will provide for their traceability.

To be continued...



Inless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx.and, for electronic format documents, vibulect to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.apx.
to the first and information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of violated that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of limits instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a ransaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or special content or this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the soults shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Retaition To check the authenticity of testing / inspection report & certificate, please contact us at telephone (86-75) 8307



No. AJFS1801000867FF

Date: MAR.06, 2018

Page 6 of 8

Annex A

Classes of reaction to fire performance for construction products excluding floorings and linear pipe thermal insulation products

Class	Test method(s)		Classification criteria	Additional classification
	EN ISO 1182 ^a and		\triangle T≤30°C, and \triangle m≤50%, and t _f =0(i.e. no sustained flaming)	-
A1	EN ISO 1716		PCS≤2.0MJ/kg ^a and PCS≤2.0MJ/kg ^{b c} and PCS≤1.4MJ/m ^{2 d} and PCS≤2.0MJ/kg ^e	-
	EN ISO 1182 ^a or		<i>∆T</i> ≤50°C, and <i>∆m</i> ≤50%, and t _f ≤20 s	-
A2	EN ISO 1716	and	PCS≤3.0MJ/kg a and PCS≤4.0MJ/m² b and PCS≤4.0MJ/m² d and PCS≤3.0MJ/kg e and	-
	EN 13823		FIGRA≤120W/s and LFS <edge and<br="" of="" specimen="">THR_{600s}≤7.5MJ</edge>	Smoke production ^f and Flaming droplets/particles ^g
В	EN 13823	and	FIGRA≤120W/s and LFS <edge and<br="" of="" specimen="">THR_{600s}≤7.5MJ</edge>	Smoke production ^f and Flaming droplets/particles ^g
	EN ISO 11925-2 i Exposure =30s		within 60s <i>F</i> s≤150mm	Training dropicts/particles
С	EN 13823 and		FIGRA≤250W/s and LFS <edge and<br="" of="" specimen="">THR_{600s}≤15MJ</edge>	Smoke production ^f and Flaming droplets/particles ^g
	EN ISO 11925-2 Exposure=30s		Fs≤150mm within 60 s	Framing dropiets/particles
	EN 13823	and	FIGRA≤750W/s	Smoke production ^f and
D	EN ISO 11925-2 i Exposure=30s		Fs≤150mm within 60 s	Flaming droplets/particles ^g
E	EN ISO 11925-2 i Exposure =15s		Fs≤150mm within 20 s	flaming droplets/particles h

To be continued...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overteef, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspy.and, for electronic format documents subject to Terms and Conditions of Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Documents. The subject to Terms and Conditions/Terms-and-Document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limitst Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content of appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



No. AJFS1801000867FF


Date: MAR.06, 2018

Page 7 of 8

F No performance determined

- ^a For homogeneous products and substantial components of non-homogeneous products.
- ^b For any external non-substantial component of non-homogeneous products.
- ^c Alternatively, any external non-substantial component having a PCS \leq 2,0 MJ/m², provided that the product satisfies the following criteria of EN 13823: FIGRA \leq 20 W/s, and LFS < edge of specimen, and THR_{600s} \leq 4,0 MJ, and s1, and d0.
- ^d For any internal non-substantial component of non-homogeneous products.
- ^e For the product as a whole.
- In the last phase of the development of the test procedure, modifications of the smoke measurement system have been introduced, the effect of which needs further investigation. This may result in a modification of the limit values and/or parameters for the evaluation of the smoke production.
- $s1 = SMOGRA \le 30m^2/s^2$ and $TSP_{600s} \le 50m^2$; $s2 = SMOGRA \le 180m^2/s^2$ and $TSP_{600s} \le 200m^2$; $s3 = not\ s1$ or s2
- ^g d0 = No flaming droplets/ particles in EN 13823 within 600 s;
- d1 = no flaming droplets/ particles persisting longer than 10 s in EN 13823 within 600 s;
- d2 = not d0 or d1.
- Ignition of the paper in EN ISO 11925-2 results in a d2 classification.
- ^h Pass = no ignition of the paper (no classification);
- Fail = ignition of the paper (d2 classification).
- Under conditions of surface flame attack and, if appropriate to the end-use application of the product, edge flame attack.

Photo Appendix:

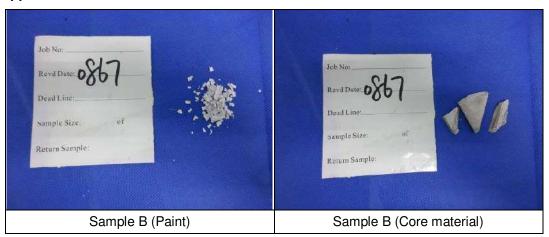

To be continued...



Inless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed verleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Condit



Test Report No. AJFS1801000867FF Date: MAR.06, 2018 Page 8 of 8



SGS authenticate the photo on original report only

End of Report



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic forms thousants, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not experience to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention.To check the autherticity of testing / inspection report & certificate, please contact us at telephone (86-755) 8307

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejjang Province, China 313300 t (86-572) 5018825 f (86-572) 5018820 www.sgsgroup.com.cn 中国 - 浙江 - 安吉县阳光工业园二区阳光大道301号 邮编:313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com